


PIPE RESTRAINT LENGTHS	
PIPE SIZE	L ₁
4"	36'
6"	53'
8"	71'
10"	86'
12"	103'

NOTE: THESE ARE THE MINIMUM PIPE RESTRAINT LENGTHS UNLESS STATED OTHERWISE ON THE PLANS. VALUES SHOWN HEREIN ASSUME 200PSI MAX TESTING PRESSURE WITH WELL GRADED GRAVEL BEDDING AND 3' STANDARD COVER.

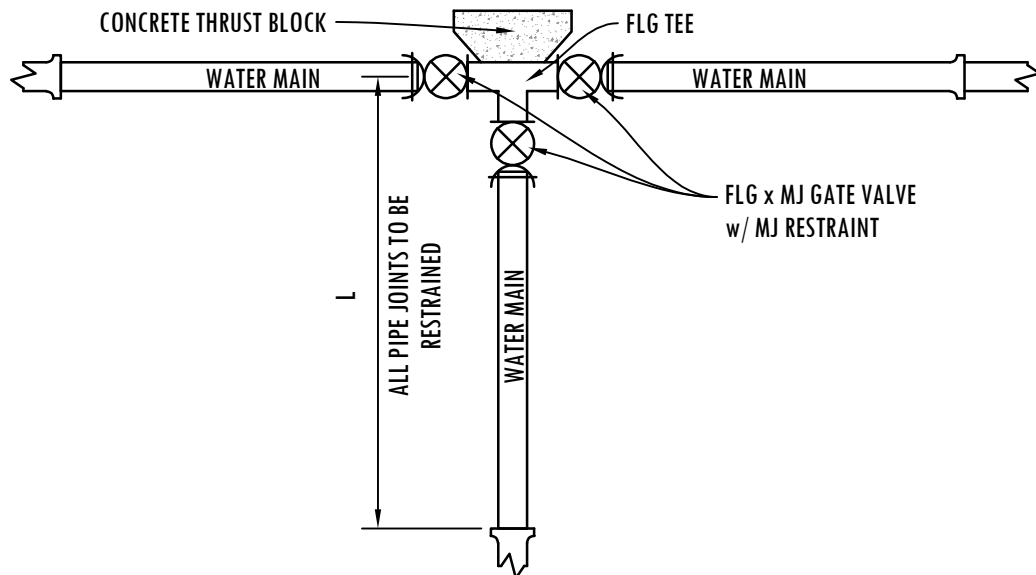

REVISED JANUARY 2026

FILE NAME		TYPICAL FITTING & VALVE INSTALLATION DETAIL	<div>Clark Public Utilities</div> 
22W			
SHEET	1 OF 1	STANDARD DETAILS	